MODEL – KG1–100WS1



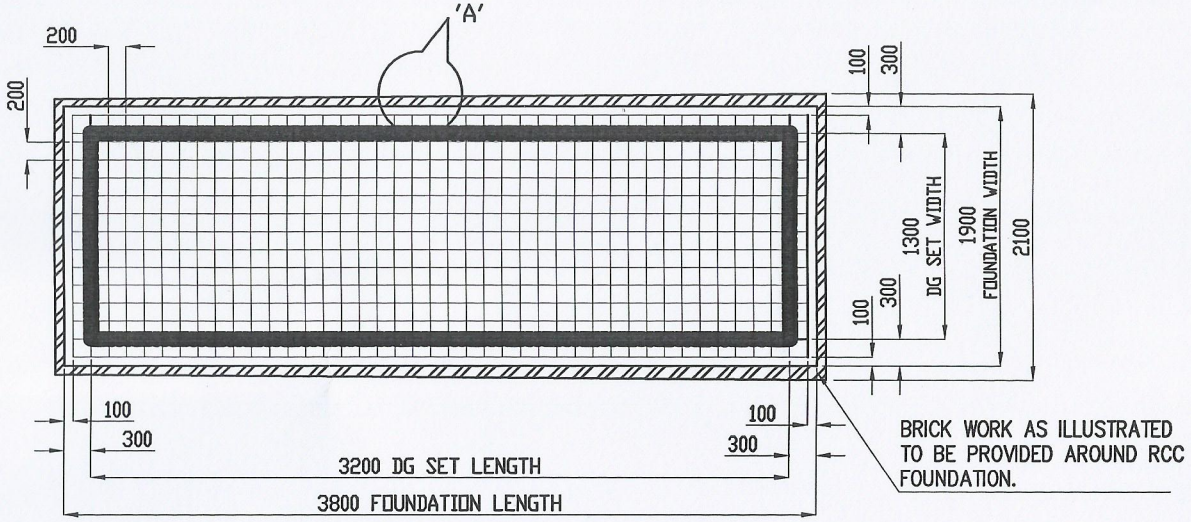

NOTES:–1) FOUNDATION TO BE MADE ON A GOOD PREPARED SURFACE WITH SOIL STRATA BEARING CAPACITY ADEQUATE TO SUPPORT THE WEIGHT OF GENSET & FOUNDATION. REFER CHART FOR SOIL STRENGTH.

NATURE OF LOAD BEARING MATERIAL	SAFE BEARING CAPACITY KG/SQM
HARD ROCK GRANITE	2,44,100 – 9,76,400
MEDIUM ROCK SHELL	97,600 – 1,46,400
HARD PAN	78,100 – 97,600
SOFT ROCK	48,800 – 58,600
HARD CLAY	39,000 – 48,800
GRAVEL AND COARSE SAND	39,000 – 48,800
LOOSE,MEDIUM COARSE AND COMPACTED FINE SAND.	29,300 – 39,000
MEDIUM CLAY	19,500 – 39,000
LOOSE FINE SAND	9,750 – 39,500
SOFT CLAY	9,750

2) THE LENGTH & WIDTH OF FOUNDATION SHOULD BE AT LEAST 300 mm MORE ON EACH SIDE THAN GENSET LENGTH & WIDTH RESPECTIVELY.
3) CHECK THE FOUNDATION LEVEL DIAGONALLY AS WELL AS ACROSS THE LENGTH & WIDTH FOR EVEN FLATNESS AND SAME SHOULD BE WITHIN ±50mm IN HORIZONTAL PLANE IN ANY ONE DIRECTION ONLY.
4) ENSURE THAT THE CONCRETE IS COMPLETELY CURED BEFORE POSITIONING THE GENSET.
5) ENSURE THAT THE FOUNDATION TO SUPPORT 1.5 TIMES (DYNAMIC LOAD) OF THE TOTAL WET WEIGHT OF THE SINGLE GENERATING SET INSTALLATION & 2 TIMES OF THE TOTAL WET WEIGHT FOR THE MULTIPLE GENERATING SET INSTALLTION.
6) FOR ROOFTOP INSTALLATION,IT IS NECESSARY TO HAVE PLANNING AND STRUCTURAL DESIGN APPROVAL.
7) DO NOT INSTALL GENSET ON LOOSE SAND OR CLAY. AVOID HARD/SHARP PROJECTIONS SUCH AS STONE OR STEEL PARTS ON FOUNDATION SURFACE,WHICH MAY DAMAGE FUEL TANK AT BOTTOM.
8) AVOID UNEVEN FOUNDATION WHICH MAY LEAD TO IMPROPER RESTING OF GENSET ON FOUNDATION,THERE BY LEADING TO LEAKAGE OF SOUND AND VIBRATION ON GENSET.
9) IF GENSET IS TO BE MOUNTED ON FOUNDATION HAVING UNEVEN SURFACE UNDER UNAVOIDABLE CIRCUMASTANCES,USE APPROPRIATE THICKNESS OF RUBBER MATTING ABOVE FOUNDATION FOR POSITIVE SEALING OF GENSET WITH BASE.
10) FOR CABLE TRENCH OPENING OPTION ON FOUNDATION. REFER TO GENSET GENERAL ARRANGEMENT DRAWING.

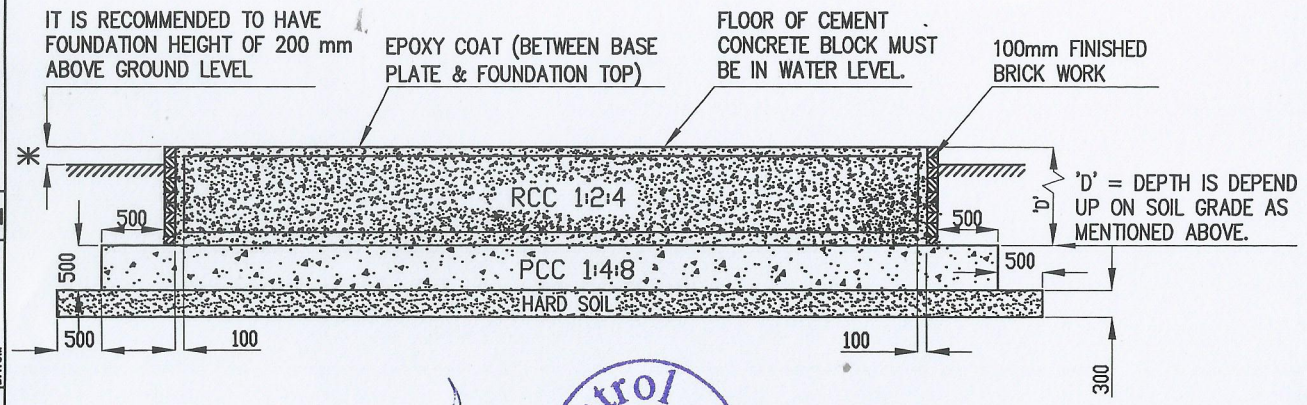

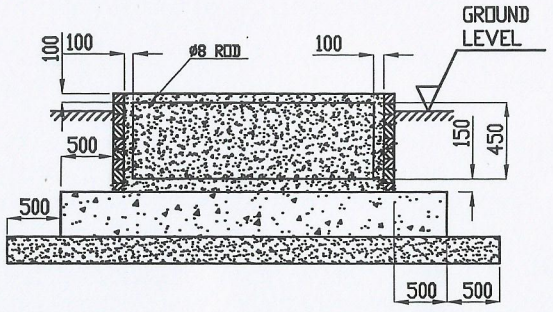

DO NOT SCALE THE DRAWING

IF IN DOUBT ASK

THIS DRAWING IS PROPERTY OF KALA GENSET PVT. LTD. AND MUST BE RETURNED ON REQUEST. IT IS SUBMITTED AS CONFIDENTIAL INFORMATION WITH OUR ENQUIRY, TENDER, ORDER OR CONTRACT NO. IT IS NOT TO BE ISSUED FOR ANY OTHER PURPOSE OR ORDER NOR MAY BE COPIED OR LENT WITHOUT OUR AUTHORITY IN WRITING.

FROM UPTO & INCLUDING	0.5 – 3	3 – 6	6 – 30	30 – 120	120 – 400	400 – 1000	1000–2000	2000–4000
DEVIATION mm	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2

DEVIATION ON NON TOLERANCED LINEAR MACHINED DIMENSIONS. IS:2102 (Pt.–1)–1993 MEDIUM cLASS

GEOMETRIC TOLERANCE SYMBOLS IS:8000 (Pt.–1)–1985.					
STRAIGHTNESS	RUN OUT	CONCENTRICITY	SYMMETRY	M.M.C.	TRUE POSITION
FLATNESS	ANGULARITY				DATUM
ROUNDNESS	POSITION				
CYLINDRICITY					
PROFILE OF A LINE					
PROFILE OF A SURFACE					
PARALLELISM					
SQUARENESS					

PRODUCT IMPROVEMENT IS A CONTINUOUS PROCESS.DIMENSION SPECIFICATION MAY CHANGE WITH IMPROVEMENT. KINDLY CONTACT KOEL FOR LATEST INFORMATION

PRINTS OF PREVIOUS REVISION NO SHOULD BE SCRAPPED

Rev. No.	REVISION	MODIFIED BY	APPROVED BY	REF. DATE
R02	FOUNDATION DRAWING REVISED AS PER KOEL LATEST RECOMMENDATIONS. EMAIL FROM THIRU ON DTD. 2.11.17	MBT	DCG	08.11.17
R01	FOUNDATION DRAWING REVISED .	MBT	DCG	03.05.17

1 8/11/2017

Control Copy

UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN mm.
- UNMENTIONED TOLERANCES AS PER CO.STD.NO.11001.
- REMOVE ALL SHARP BURRS AND SHARP EDGES.

PROJECT/ CUSTOMER NAME

CAD DRG. FILE

MATERIAL

UNMENTIONED		DRN	MOHALI
RADII		CHD.	DCG
CHAMFER		APPD.	DCG
UNDERCUT		DATE	15.02.2016

KALA GENSET PVT LTD.
PUNE 410501 (INDIA)

DRAWING No–4K1080TA/100 kVA/FP1/01

SHEET– 1 OF 1

SCALE – 14

TITLE: FOUNDATION PLAN DRAWING FOR 4K1080TA G2_100kVA

FIRST ANGLE PROJECTION